

SUB 702-AS MK3

ACTIVE SUBWOOFER



Description

The SUB 702-AS mk3 is a portable 12" high-power active subwoofer for live sound applications. It features a state-of-the-art transducer with a high-power ceramic magnetic circuit and a powerful Class-D amplifier that delivers sound pressure levels up to 129 dB with exceptional headroom. Designed as the ideal complement for 8" or 10" loudspeakers, it provides outstanding performance in any application. Rear panel controls include volume, EQ, polarity, and crossover frequency selection. The rugged all-wood cabinet with scratch-resistant polyurea coating makes it durable, easy to carry and install securely. With its versatility, sound quality, and high power output, the SUB 702-AS MK3 is perfect for small to mid-sized venues and portable applications.

Features

- > 1400 Watt Class-D Amplifier
- > 12" Woofer, bass reflex housing
- > Stereo Crossover
- > Switchable Crossover Frequencies
- > Polarity-reverse switch
- > Electronic equalization, soft limiter and protection
- > Stereo XLR input, Stereo XLR signal output
- > Bass Motion Control excursion management

Part Number

13000818 SUB 702-AS MK3 13000819 SUB 702-AS MK3 220-240 V Black 100-120 V Black EAN 8024530020477 EAN 8024530021382


Technical Specifications Page 1 of 2



SUB 702-AS MK3

ACTIVE SUBWOOFER

Line Art 2D

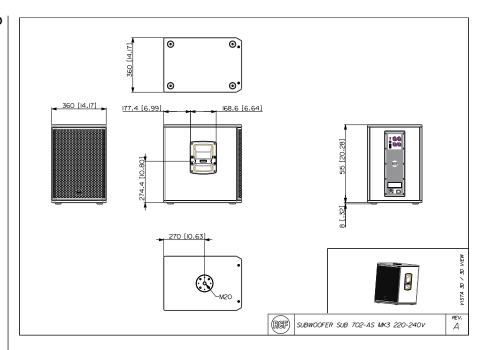

TECHNICAL SPECIFICATIONS

Acoustical specifications Frequency Response 40 Hz ÷ 120 Hz

Max SPL @ 1m 129 dB

Transducers Woofer 12", 2.5" v.c
Input/Output section Input signal bal/unbal

on Input signal bal/unbal Input connectors XLR

Output connectors XLR

Processor section Hi-Pass Frequencies 110 Hz

sectionHi-Pass Frequencies110 HzLow-Pass Frequencies80 Hz

Protections Thermal, RMS

Limiter Soft Limiter

Power section Controls Volume, EQ, Phase, Xover
1400 W Peak, 700 W RMS

Low frequencies 1400 W Peak, 700 W RMS

Cooling Convection
Connections VDE

Standard compliance Safety agency CE compliant

Physical specifications Handles One each side

Pole mount/Cap Yes

Color Black

 Height
 523 mm / 20.59 inches

 Width
 360 mm / 14.17 inches

 Depth
 515 mm / 20.28 inches

 Weight
 21.5 kg / 47.4 lbs

ACCESSORIES

Size

 Protections
 CVR 005
 13360528
 8024530020408

 Rigging / Mounting
 PM-KIT M20
 13360067
 8024530014599

Technical Specifications Page 2 of 2