

SUB 8003-AS MK3

PROFESSIONAL POWERED 18" SUBWOOFER

Description

The SUB 8003-AS MK3 is a self-powered extended low-frequency subwoofer with internal DSP. Its compact cabinet houses a state-of-the-art 18" transducer featuring ceramic magnets and a 4.0" voice coil. The internal amplifier manages up to 2200W power output, delivering sound pressure levels up to 135 dB. Proprietary Bass Motion Control processing provides extended linearity and remarkable sound integrity. Rear panel controls include presets, crossover frequency, and polarity selection, cardioid, and output delay settings. The tour-ready, rugged all-wood cabinet with scratch-resistant polyurea coating is stackable and lightweight, ensuring quick set-ups and tear-downs. Built specifically for highly demanding applications, SUB 8003-AS MK3 is the perfect workhorse for music professionals.

Features

- > 2200 W
- > 135 dB max SPL
- > 35 Hz 120 Hz frequency response
- > 18" Woofer, 4.0" v.c.
- › Multi-ply hardwood polyurea-coated
- > Selectable gain, X-over, cardioid mode and time delay
- > Stereo XLR input, Stereo XLR signal output

Part Number

13000844 SUB 8003-AS MK3 EU 100-240 V Black EAN 8024530021313 13000845 SUB 8003-AS MK3 US 100-240 V Black EAN 8024530021399


Technical Specifications Page 1 of 2



SUB 8003-AS MK3

PROFESSIONAL POWERED 18" SUBWOOFER

Line Art 2D

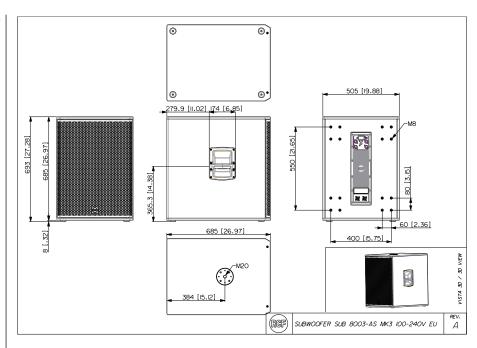

TECHNICAL SPECIFICATIONS

Acoustical specifications

Frequency Response 35 Hz ÷ 120 Hz Max SPL @ 1m 135 dB

Transducers

18", 4.0" v.c Woofer bal/unbal Input signal Input connectors XLR Output connectors XLR

Input/Output section

Processor section

Input sensitivity -2 dBu/+4 dBu Crossover Frequencies Selectable Thermal, RMS Protections

Limiter

Controls Gain, EQ, Phase, Xover, Delay, Cardioid

Soft Limiter

Power section

Total Power 2200 W Peak Cooling Convection Powercon IN/OUT Connections Safety agency CE compliant

Standard compliance **Physical specifications**

Handles One handle each side Color Black

Size

Height 693 mm / 27.28 inches Width 505 mm / 19.88 inches 685 mm / 26.97 inches Depth 43.2 kg / 95.24 lbs Weight

ACCESSORIES

Protections Rigging / Mounting **Transportation** CVR 003 13360530 8024530020422 PM-KIT M20 13360067 8024530014599 WH PRO 4X 13360238 8024530018320

Technical Specifications Page 2 of 2