



EVOX V15

PROFESSIONAL THREE-WAY COLUMN SYSTEM



Description

The EVOX V15 is a professional three-way active column loudspeaker designed to deliver clarity, output, and reliability in demanding live sound applications. A 1.75" compression driver on a 120° x 40° True Resistive Waveguide ensures wide, coherent coverage, while ten 4" midrange transducers deliver precise vocal definition. A high-power 15" woofer in a bass-reflex enclosure provides deep, controlled lows. Powered by a 3500 W dual-channel Class-D amplifier, the system achieves 133 dB SPL with touring-grade dynamics. Part of the EVOX Series, the V15 combines RCF transducer and DSP technology in a sleek format, offering natural sound and straightforward deployment for bands, DJs, and live events.

Features

- › 133 dB Max SPL
- › 3500 W Class-D Amplifier - Built-In DSP
- › 1.75" Neo Compression Driver - 120° X 40° True Resistive Waveguide
- › 10 X 4" Mid-Range Neo Transducers
- › 15" RCF Precision Low-Frequency Woofer
- › Enhanced Coverage And Clarity
- › Composite Column, Plywood Woofer Enclosure
- › PowerCon True1-TOP Mains Connector
- › Top Speaker Padded Carrying Bag Included

Part Number


| | | | |
|---------------------|-----------|------------------|-------------------|
| 13000949 EVOX V15 | 220-240 V | Black | EAN 8024530024154 |
| 13000980 EVOX V15 | 100-120 V | Black | EAN 8024530024192 |
| 13000989 EVOX V15 W | 220-240 V | White - RAL 9003 | EAN 8024530024512 |
| 13000990 EVOX V15 W | 100-120 V | White - RAL 9003 | EAN 8024530024529 |



EVOX V15

PROFESSIONAL THREE-WAY COLUMN SYSTEM

Line Art 2D

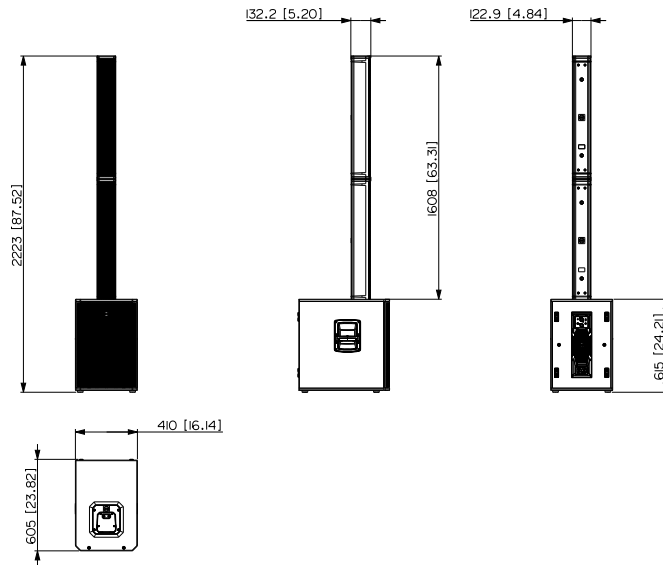

TECHNICAL SPECIFICATIONS

| | | |
|----------------------------------|---------------------------|--|
| Acoustical specifications | Frequency Response | 35 Hz - 20000 Hz |
| | Max SPL @ 1m | 133 dB |
| | Horizontal coverage angle | 120° |
| | Vertical coverage angle | 40° |
| Transducers | Compression Driver | 1 x 1.0" neo, 1.75" v.c |
| | Fullrange | 10 x 4.0" neo, 1.0" v.c |
| | Woofer | 15", 3.0" v.c |
| Input/Output section | Input signal | bal/unbal |
| | Input connectors | Combo XLR/Jack |
| | Output connectors | XLR |
| | Input sensitivity | +4 dBu |
| Processor section | Crossover Frequencies | 160/1600 Hz |
| | Protections | Thermal, RMS |
| | Limiter | Soft Limiter |
| | Controls | Volume, Presets: LINEAR, LIVE, CLUB, VOICE |
| Power section | Total Power | 3500 W Peak |
| | High frequencies | 1500 W Peak |
| | Low frequencies | 2000 W Peak |
| | Cooling | Convection |
| | Connections | Powercon TRUE1 TOP IN/OUT |
| Standard compliance | Safety agency | CE compliant |



EVOX V15

PROFESSIONAL THREE-WAY COLUMN SYSTEM

| | | | | |
|--------------------------------|-------------------------|---------------------------------------|-------------------|--|
| Physical specifications | Cabinet/Case Material | Baltic birch plywood/PP Composite | | |
| | Handles | One handle each side of the subwoofer | | |
| | Grille | Steel | | |
| | Color | Black, White - RAL 9003 | | |
| Size / Weight | Height | 2223 mm / 87.52 inches | | |
| | Width | 410 mm / 16.14 inches | | |
| | Depth | 605 mm / 23.82 inches | | |
| | Weight | 47.5 kg / 104.72 lbs | | |
| | ACCESSORIES | | | |
| Protections | COVERS | | | |
| | 13360758 CVR60758 | Black | EAN 8024530024550 | |
| | 13360786 CVR60786 | Black | EAN 8024530025304 | |
| Transportation | KART WITH WHEELS | | | |
| | 13360763 CRT60763 | Black | EAN 8024530025311 | |